

CV15 SHORT - 15 mm OD

Check Valve Cartridge - Spring Loaded



flow, stop and go®



Features and Benefits

- ▶ 100% factory tested drip tight operation.
- ▶ Easy to insert into the application device.
- ▶ Spring loaded plunger: operates in any position.
- ▶ Low headloss, low cracking pressure.

Certification

ANSI / NSF 61
ASME A112.18.3M

Headloss Curve

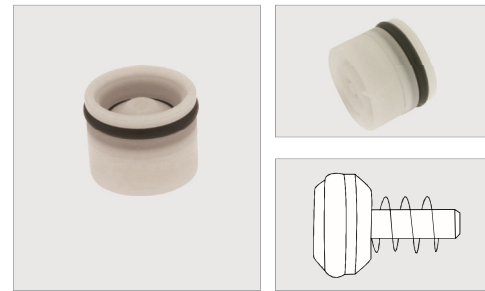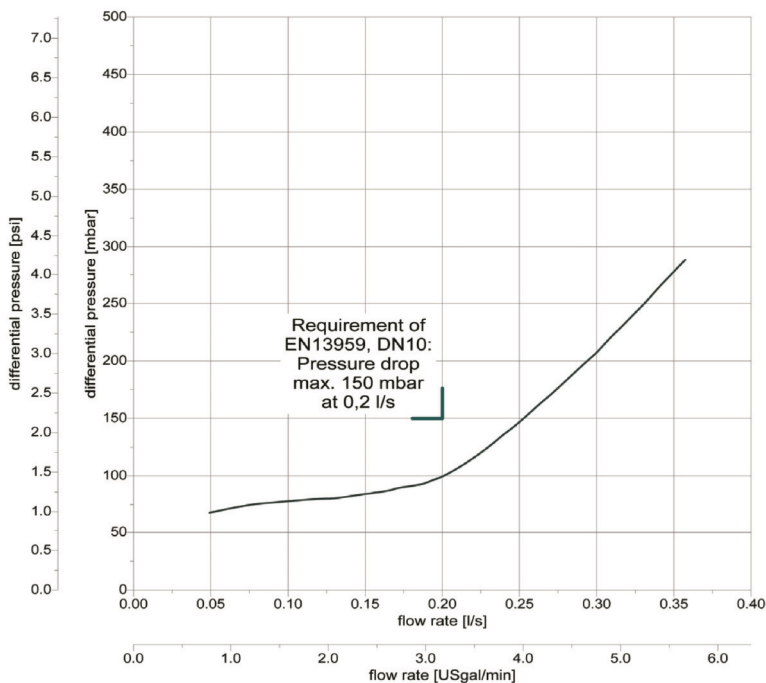

Option Available

Part #	Housing	Closing system
31.3001.0	White	White

Materials




Name	Material
Housing	Acetal
Guide	Acetal
Plunger	Acetal
Spring	Stainless steel AISI 301
O-ring seals	NBR

Technical Data


Medium: Clear water only
Approximate Cracking Pressure: 0.49 psi
Wetted surface area: 2918 mm²

Continuous

Short-term (5 minutes max.)



Dimensions

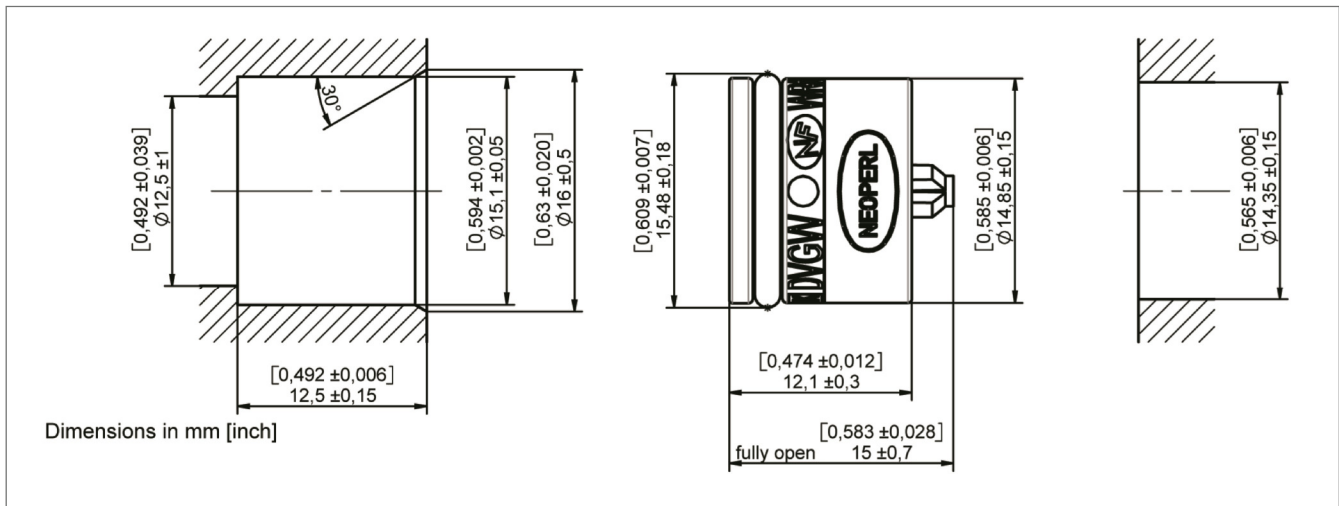

NEOPERL® Inc., Waterbury, CT • Tel: 203-756-8891 • Fax: 203-755-5717 • www.neoperl.com